


Avaya one-X Communicator Client Install Document



Opening one-X Settings

- Click on Start, then Avaya one-X
- Click on * and go to Settings

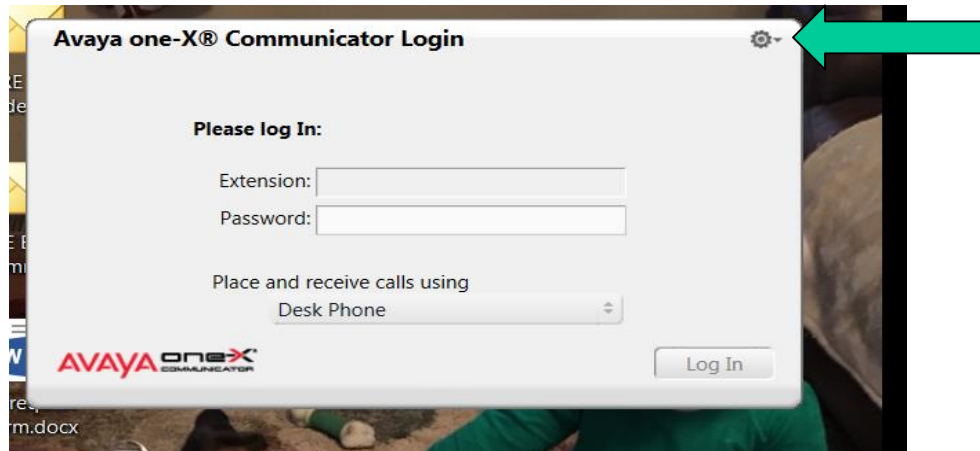

- Only go to the tabs listed on the following pages to make necessary changes ...

Telephony

General Settings ? x

Accounts

- Telephony
- Login
- Messaging
- IM and Presence
- Security

Devices and Services

- Outgoing Calls
- Phone Numbers
- Dialing Rules
- Audio
- Video
- Public Directory
- Preferences
- Desktop Integration
- Hot Keys
- Network
- Advanced

Telephony

Using: H.323 SIP

Extension:

Password:

Server List:

- 10.242.0.21:5061;transport=tls
- 10.242.0.23:5061;transport=tls
- 10.242.2.21:5061;transport=tls

Domain:

Mode:

Avaya Environment:

Failback Policy:


Registration Policy:

Enable Video Calls

Enter your 10-digit phone number


Enter your passcode to your phone

IM and Presence

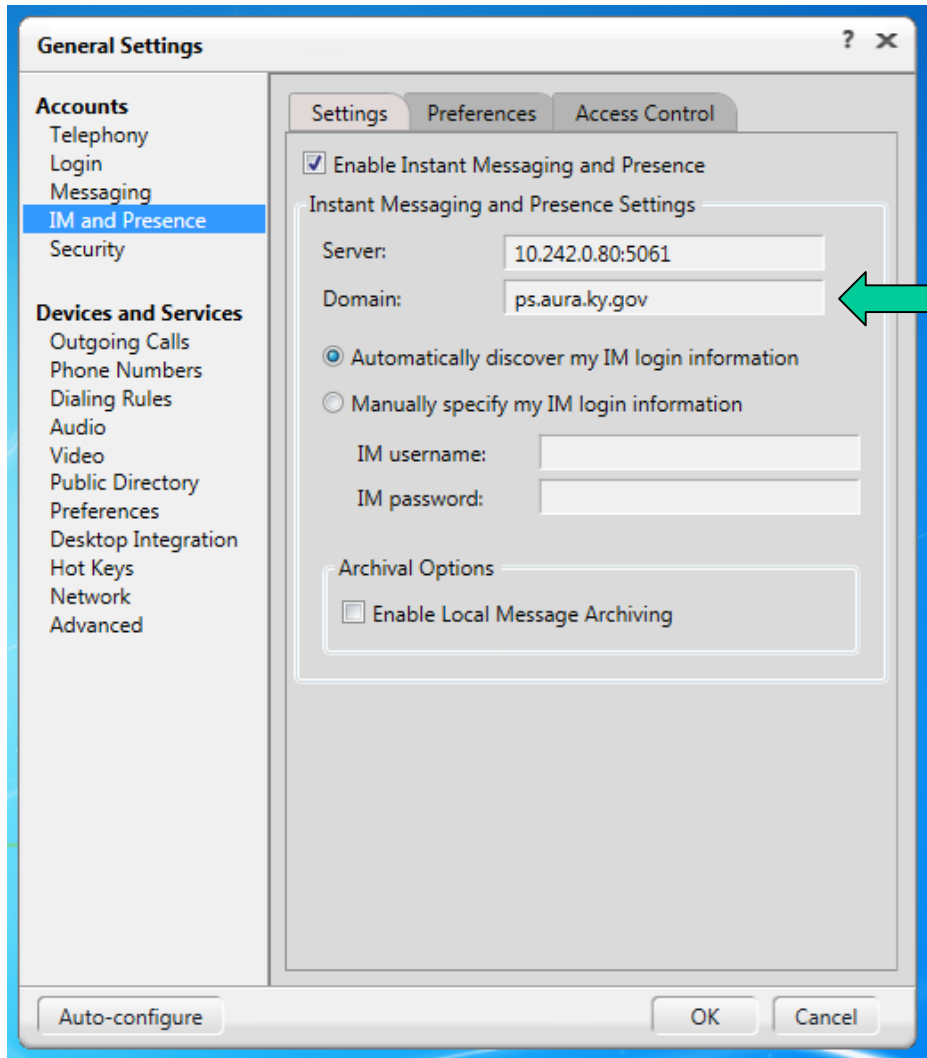

ENTER

Outgoing Calls

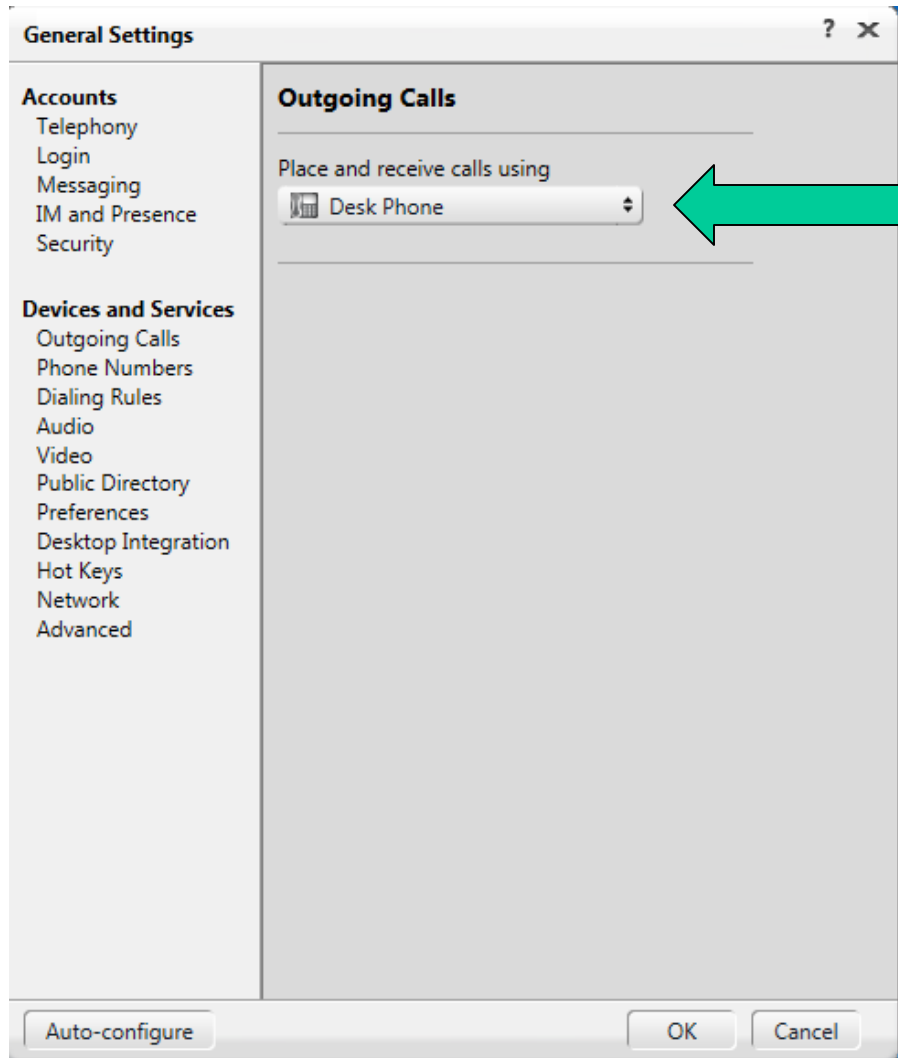

Change to Desk Phone

Dialing Rules

General Settings ? X

Accounts

- Telephony
- Login
- Messaging
- IM and Presence
- Security

Devices and Services

- Outgoing Calls
- Phone Numbers
- Dialing Rules
- Audio
- Video
- Public Directory
- Preferences
- Desktop Integration
- Hot Keys
- Network
- Advanced

Dialing Rules

Number to dial to access an outside line:

Your country code:

Your area/city code:

PBX Main Prefix:

Number to dial for long distance calls:

Number to dial for international calls:

Extension length for internal extension calls:

Length of national phone numbers (including area/city code):

If your country supports variable national phone numbers, each of the valid phone number lengths can be entered as a comma separated list (e.g. 10,11,12).

Apply dialing rules for outgoing calls.

Include area/city code when making a local call.

Display confirmation window before dialing a number.

Auto-configure OK Cancel

Public Directory

General Settings ? x

Accounts
Telephony
Login
Messaging
IM and Presence
Security

Devices and Services
Outgoing Calls
Phone Numbers
Dialing Rules
Audio
Video
Public Directory
Preferences
Desktop Integration
Hot Keys
Network
Advanced

Public Directory

Directory Type: Active Directory

Directory Name: ds.ky.gov

Server Address: 172.23.1.141

User name:

Password:

Search Root: dc=ds,dc=ky,dc=gov

IM Handle Mapping: Email Address

Domain Substitution

Transport Type: TCP


Server Port: 3268

Timeout: 100

Max Entries: 25


Use Active Directory GSS Bind

Auto-configure OK Cancel

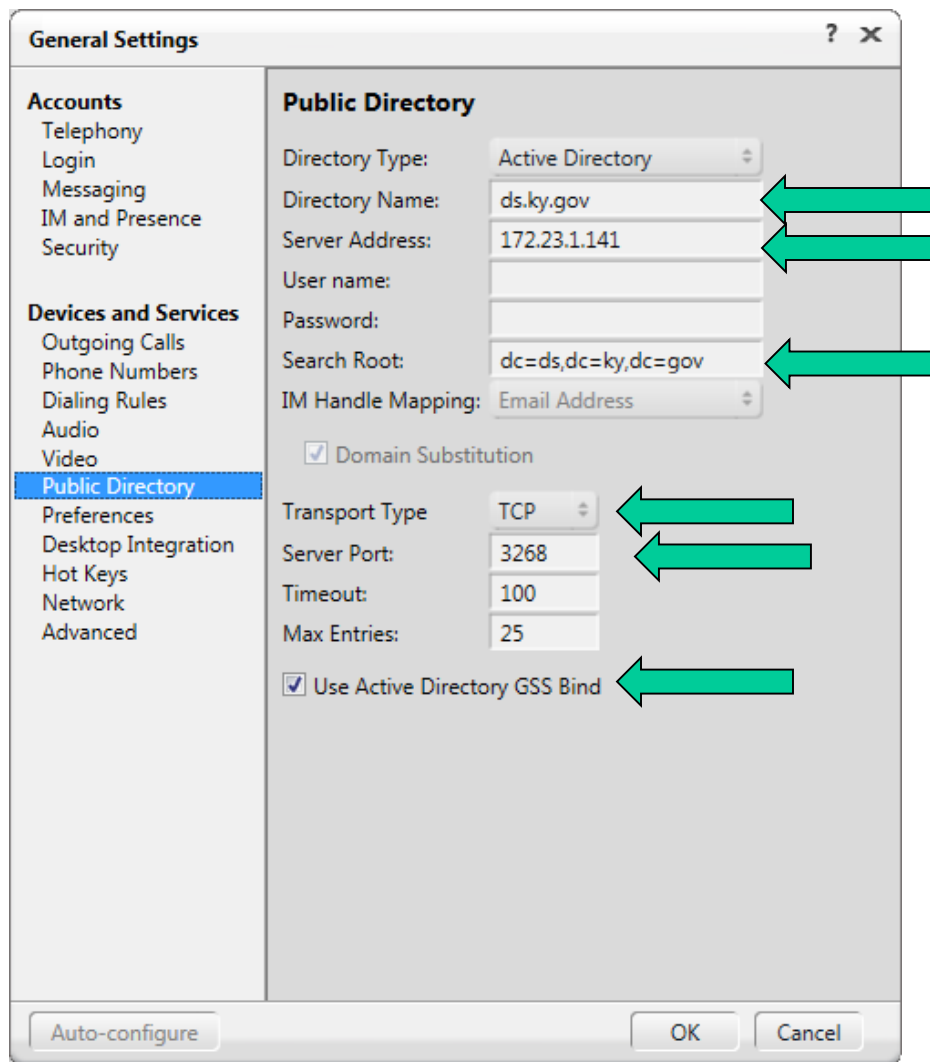


The screenshot shows a configuration window for a Public Directory. The window has a sidebar on the left with categories 'Accounts' and 'Devices and Services'. The 'Public Directory' option is selected and highlighted. The main area contains several configuration fields. Green arrows point to the following fields: 'Directory Name' (ds.ky.gov), 'Server Address' (172.23.1.141), 'Search Root' (dc=ds,dc=ky,dc=gov), 'Transport Type' (TCP), 'Server Port' (3268), and the 'Use Active Directory GSS Bind' checkbox (checked).


Preferences

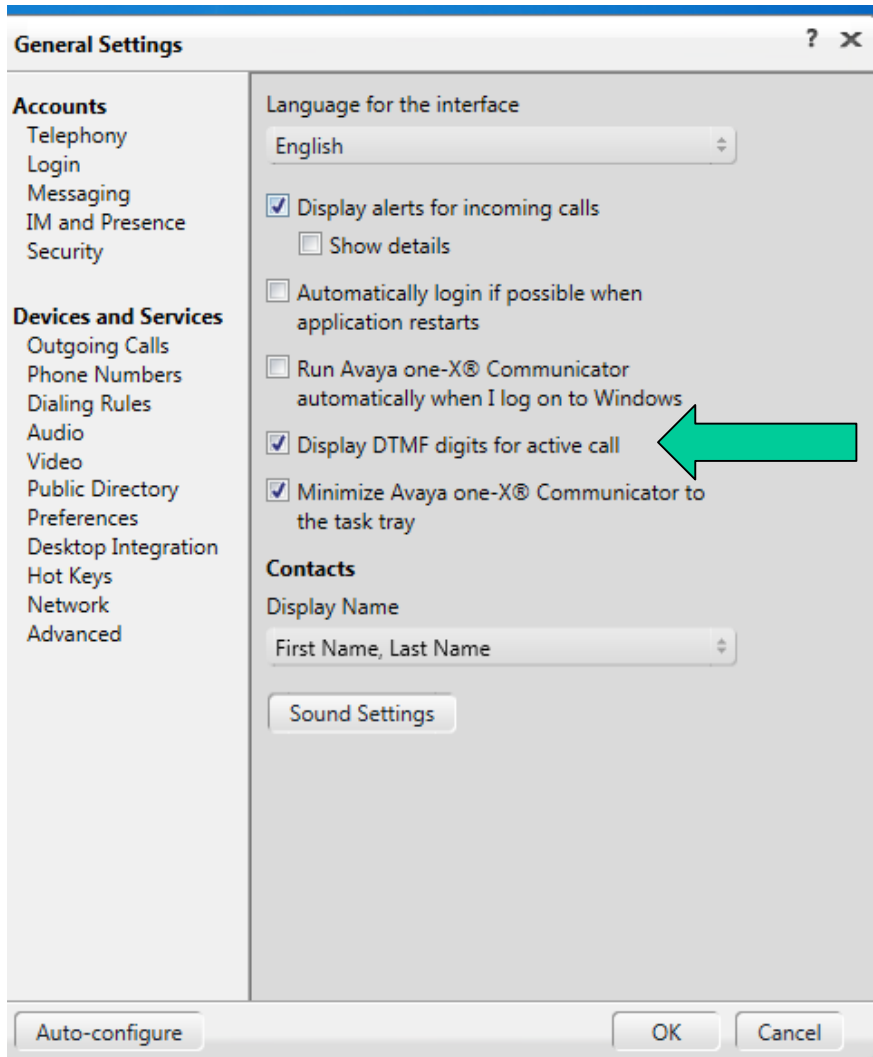

Desktop Integration

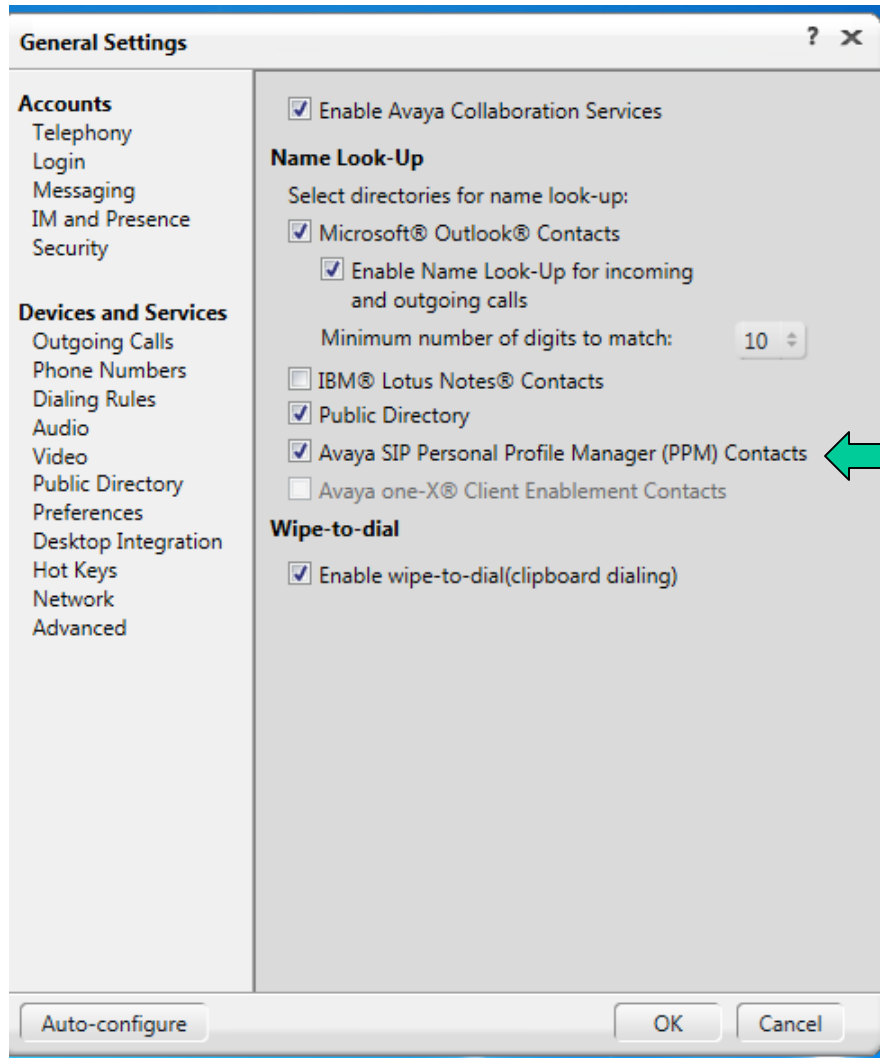

Network

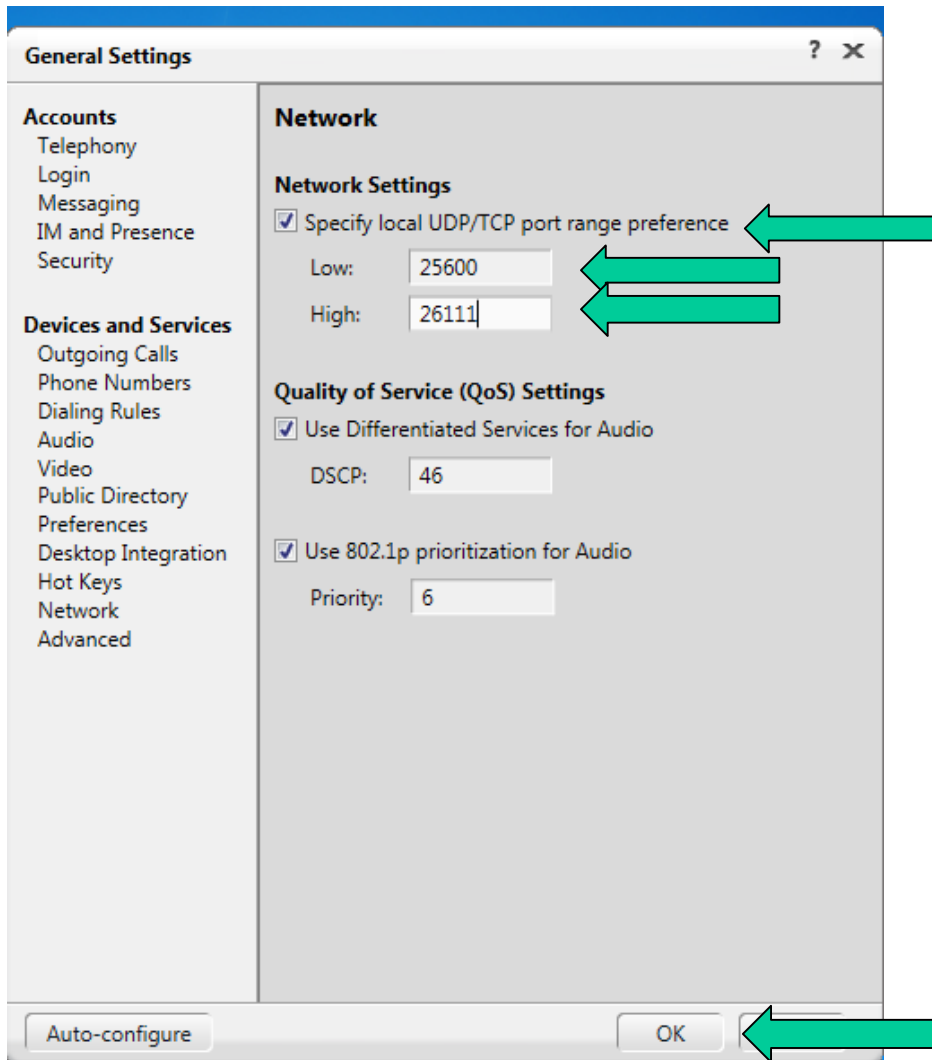

Click OK to save changes

Open up one-X Communicator

Go to your Desktop and look for the Avaya one-X Icon. Double Click Or go to Start and go to Avaya one-X



Logging In

Avaya one-X® Communicator Login

Please log In:

Extension: 5027829603

Password: ●●●●

Place and receive calls using
Desk Phone

AVAYA one-X COMMUNICATOR

Log In

Enter your 10-digit phone number

Enter your passcode to your phone (not voice mail password, pw to phone)

Make sure this says Desk Phone

Click on Log in